


# 50 A/50 mV CURRENT SHUNT

Model : ST-50

ISO-9001, CE, IEC1010

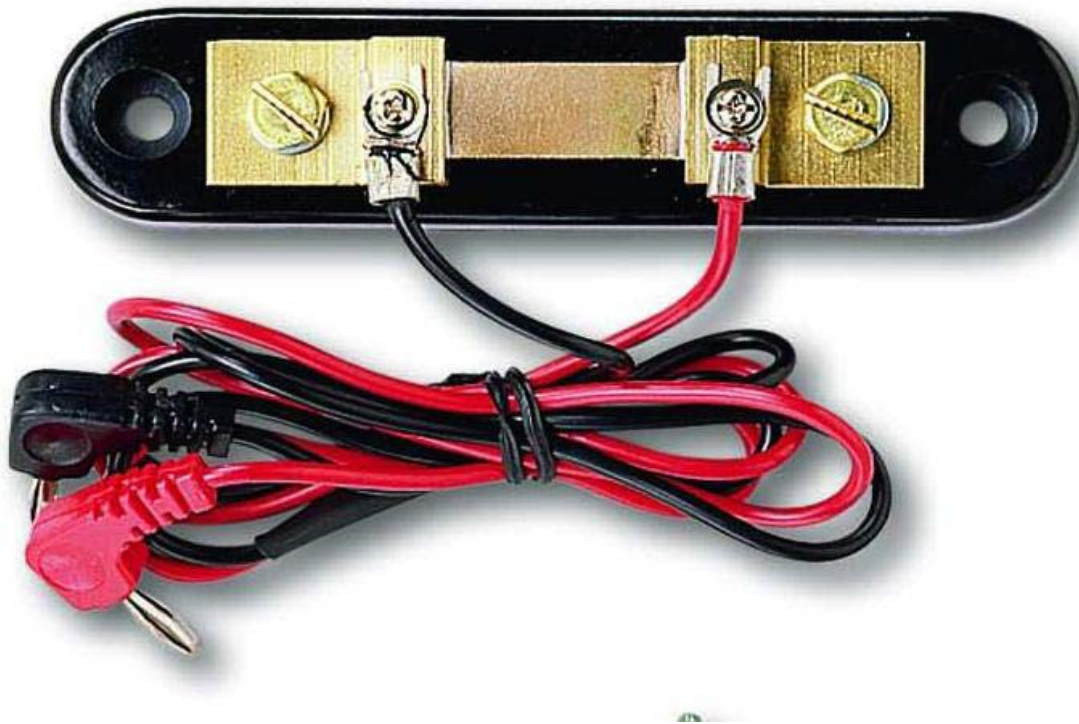

LUTRON ELECTRONIC

*The Art of Measurement*

# 50 A/50 mV CURRENT SHUNT

Model : ST-50

Range	0-50 DCA, 0-50 ACA.	
Output	ACA	1 AC mV per 1 ACA.
	DCA	1 DC mV per 1 DCA.
Accuracy	$\pm (0.8\% + 0.2 \text{ mV})$ .	
Operating Temperature	0 to 50 °C ( 32 to 122 °F ).	
Operating Humidity	Less than 90% RH.	
Dimension	135x35x30 mm (5.3x1.4x1.2 inch).	
Weight	53g/0. 12 LB.	
Accessory Included	Instruction manual .....1 PC.	
Application	Math DMM to extend the current measuring range into 50 Amp. both of DCA & ACA.	
Overload Protection	100 Amp. 1 min.	

\* Appearance and specifications listed in this brochure are subject to change without notice.

0609-ST50